
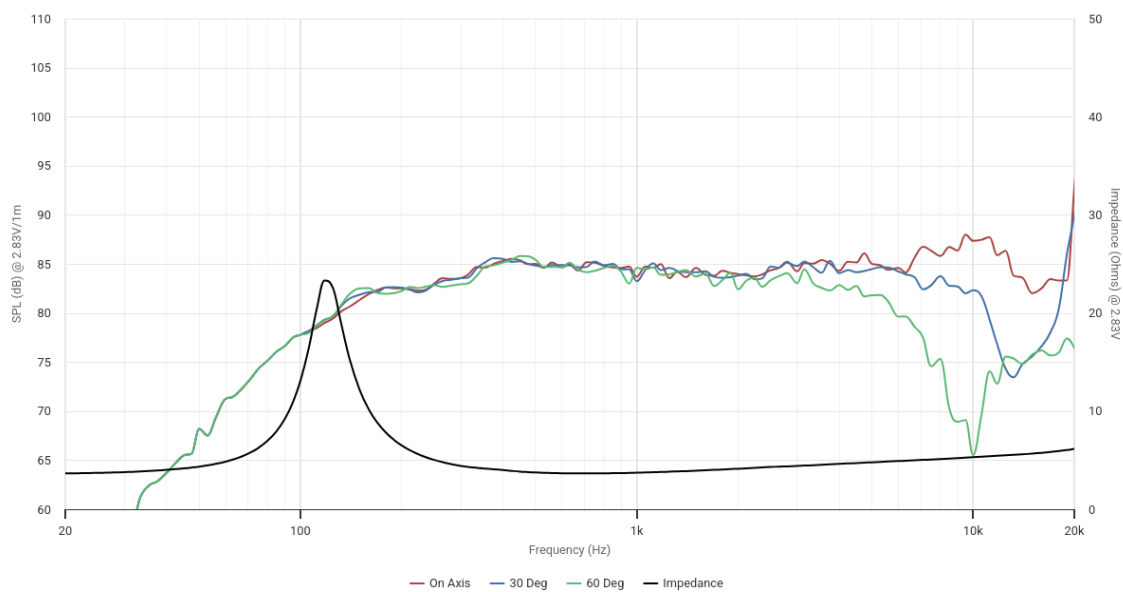


- Aluminum Diaphragm
- Copper Cap
- Neodymium Motor
- SBR Rubber Surround
- Enhanced Voice Coil Cooling

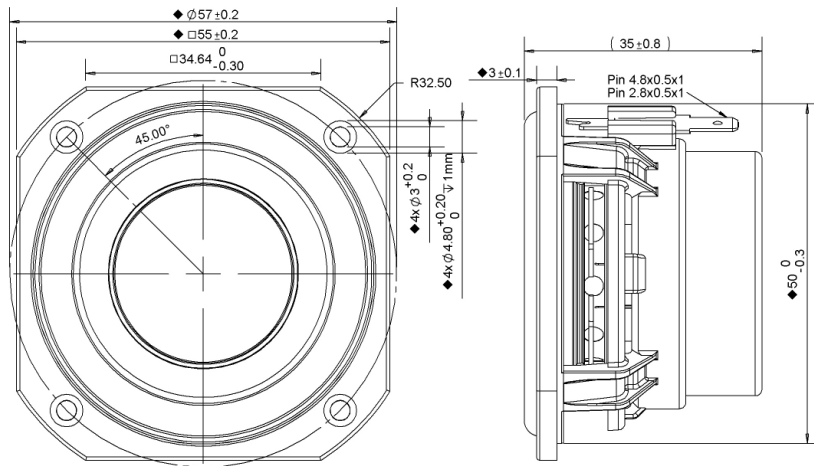

SPECIFICATIONS

Transducer Size	2	in
Impedance	4	Ω
Frequency Range ¹	200 - 15000	Hz
Sensitivity ² (2.83V 1W @ 1m)	84.9 81.9	dB
Power Rating (IEC 268-5)	20	W
Voice Coil Size	25.7	mm
Air Gap Winding Height	H_{ag} H_{vc}	3 6.3 mm
Net Weight	0.13	kg

PARAMETERS ³

Eff. Piston Area	S_d	15.2	cm ²
DC Resistance	R_e	3.4	Ω
Minimum Impedance	Z_{min}	3.6	Ω
Inductance	L_e	0.034	mH
Resonance Frequency ⁴	F_s	140	Hz
Mechanical Q Factor	Q_{ms}	6.53	-
Electrical Q Factor	Q_{es}	0.697	-
Total Q Factor	Q_{ts}	0.63	-
Moving Mass	M_{ms}	1.65	g
Compliance	C_{ms}	730	$\mu\text{m/N}$
Equivalent Volume	V_{as}	0.24	L
Motor Force Factor	Bl	2.72	Tm
Motor Efficiency	β	2.15	(Bl) ² / R_e
Linear Excursion ⁵	X_{max}	2.65	mm
Max Mechanical Excursion ⁶	X_{mech}	4.2	mm

Details on this spec sheet are for reference only and should not be used for setting production limits. Specifications and product cosmetics are subject to change without notice. Peerless is a registered trademark of Tympany Enterprises. All measurements conducted in test lab at 25°C $\pm$ 10°C, 50%RH $\pm$ 10%. ¹ Specified by Engineering as linear working range of transducer. ² Measured at 2.83V at 1m and normalized to 1W with respect to nominal impedance. ³ Measured in Free Air without preconditioning, therefore subject to some deviation. ⁴ Impedance and F_s value measured under different conditions. ⁵ Equal/Overhung: $(H_{vc} - H_{ag})/2 + H_{ag}/3$. Underhung: $(H_{ag} - H_{vc})/2 + H_{vc}/3$. ⁶ Mechanically limited excursion (e.g. bottoming, spider crash).